


RoHS HF REACH

1.1" F2.4/25MM /2OMEGA/C MOUNT


FOCAL LENGTH	f=25MM
F.NO	F=1:2.4--16
FOCUS DISTANCE	0.1M--无穷远
FLANGE BACK	17.526MM IN AIR
BACK FOCUS	34
FILTER SCREW SIZE	M35.5*P0.5
MOUNT	C
REL. ILLUMINATION	≥70%
Front/Rear Effective Dia	Front φ28.3 Rear φ17.3

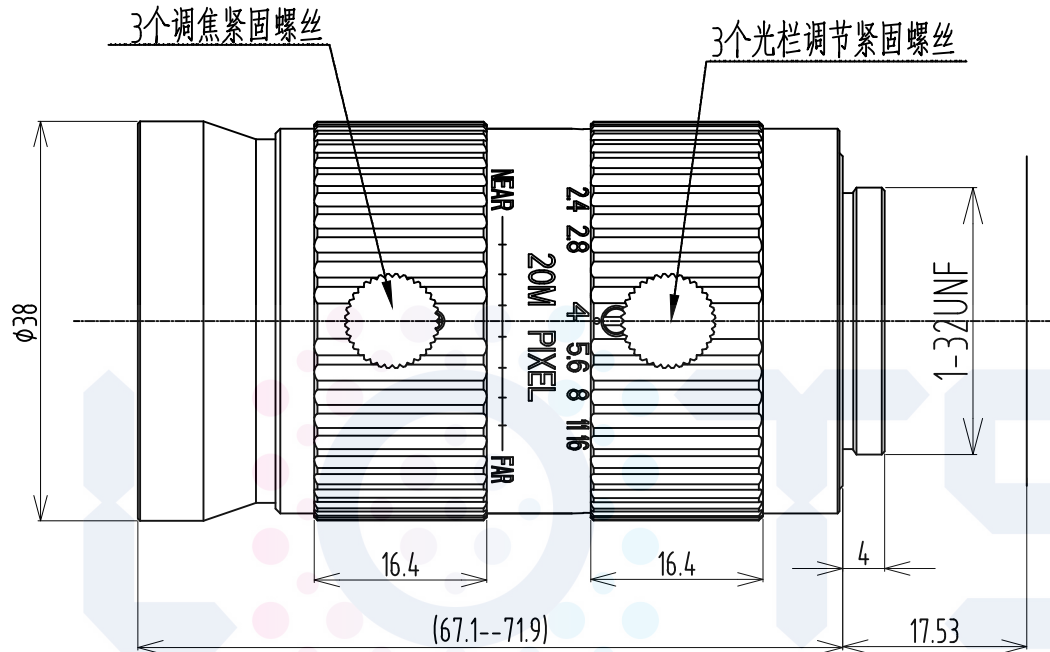

FIELD OF VIEW	SENSOR	1.1"	1"	2/3"
	D	37.3°	34.1°	23.9°
	H	30.3°	27.7°	19.2°
	V	23.1°	18.4°	14.5°

TV DISTORTION <0.2% <0.15% <0.1%

WORKING DISTANCE	OPTICAL MAGNIFICATION	1.1" FIELD OF VIEW	
MM		H	V
5000	0.005X	2779.97	2084.98
2000	0.013X	1118.64	838.98
1000	0.025X	564.79	423.59
900	0.028X	509.4	382.04
800	0.031X	453.997	340.497
700	0.035X	398.591	298.944
600	0.041X	343.177	257.383
500	0.049X	287.749	215.812
400	0.061X	232.299	174.224
350	0.069X	204.56	153.42
300	0.08X	176.807	132.605
250	0.095X	149.033	111.775
200	0.116X	121.227	90.92
150	0.151X	93.364	70.023
100	0.216X	65.39	49.05

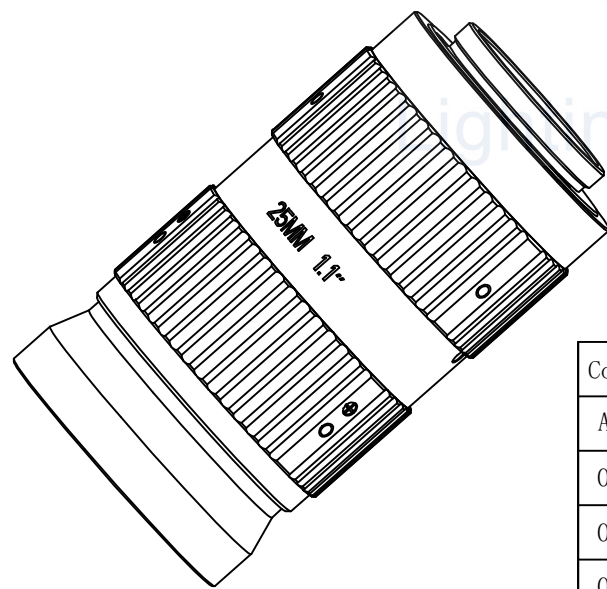

外观标准	60--40
WORKING TEMPERATURE	-40°C~80°C
STORAGE TEMPERATURE	-40°C~85°C

Common Tolerance		④				
Angle		±0.5°	③			
0.000		±0.01	②			
0.00		±0.03	①			
0.0		±0.05	Rev	Description	Name	Date
0		±0.1	Design	Examine	Checked	Approved

Material:		3RD_ANGLE_PROJN	Model:
/			
Unit		mm	Part Name:
Scale		2:1	
Ver		00	
Date		2018.09.18	Dwg No:

LOTS 乐视科技